



OVERVIEW

The IsoBlock Current-FG-SC is a 4 (four) channel (SC) module designed for high-quality isolated current measurements in the range from 6 to 50 Amperes. The IsoBlock Current-FG module provides 1200V primary-to-secondary isolation, which allows users to monitor a miscellaneous of currents at different potentials.

The IsoBlock Current-FG uses Flux-Gate methodology to measure the current flowing through the input conductor. In essence, this technique works by placing a toroid with a high number of turns (secondary) around the input current path (primary), while a close-loop circuitry controls the current through the secondary to null out the magnetic field inside the toroid. The input current is then obtained by multiplying the current from the control circuitry by the number of turns of the secondary. This is followed by an anti-aliasing filter and a conditioning stage to output a ±5V signal.

The compact form factor of the IsoBlock Current-FG module allows users to setup high channel density monitoring systems, making it ideal for deployed and portable systems.

SPECIFICATION


IsoBlock I-FG-4c	±6A	±15A	±25A
Bandwidth (-3dB point)	DC - 50kHz (up to 300kHz optional)		
Integrated sensor noise (Referenced to input)	< 3.2 mA	< 6 mA	< 10 mA
Conversion Factor	1.667 V/A	666.667 mV/A	400 mV/A
Differential input dynamic range	12A	30A	50A

Electrical	
Accuracy (percentage of range)	±0.3%
Gain (Using 5V standard output voltage)	
Max total phase shift at 60Hz	< 0.05°
Max Input delay	< 5 μs
Isolation voltage from primary side to secondary side	> ±1200V
Withstanding common mode surge voltage	±2000V
Withstanding differential mode surge voltage	±1000V
Mechanical	
Mounting Type	DIN Rail
Connectivity (Connector for power in and signal out to/ from the sensor)	Spring cage
Outer Dimensions	3.5" x 2.5" x 1.5"
Weight	205 g (7.2 oz)

Integrated sensor noise (Referenced to input)	
Input-Output non-linearity	< 280 ppm/A
Output voltage	±5V Custom
Hysteresis Error	<±10mV
Gain temperature drift	±50 ppm/°C
Differential input dynamic range	
Common mode rejection at 50kHz	108 dB
Power Supply Voltage	12V to 28 V
Output type	Differential signal
Output Offset Voltage	< ±5mV
Differential Input impedance	> 1 MΩ
Common mode impedance	> 2 GΩ 4pF
Output impedance	200Ω
Environmental	
Operating temperature	– 25 to 70 °C
Storage temperature	– 40 to 80 °C


HARDWARE DESCRIPTION

The current input connectors are located at the top of the module in the figure above. A connector that servers to power the unit and output the sensor signal lays along the bottom.




indication of input, output and power of the IsoBlock I-FG-1c

The IsoBlock Current module is designed to mount on standard NS-35 or NS-32 DIN rails with minimal preparation, providing users ease of use and flexibility.



Installation on DIN rail

MERCHANICAL DIMENSIONS

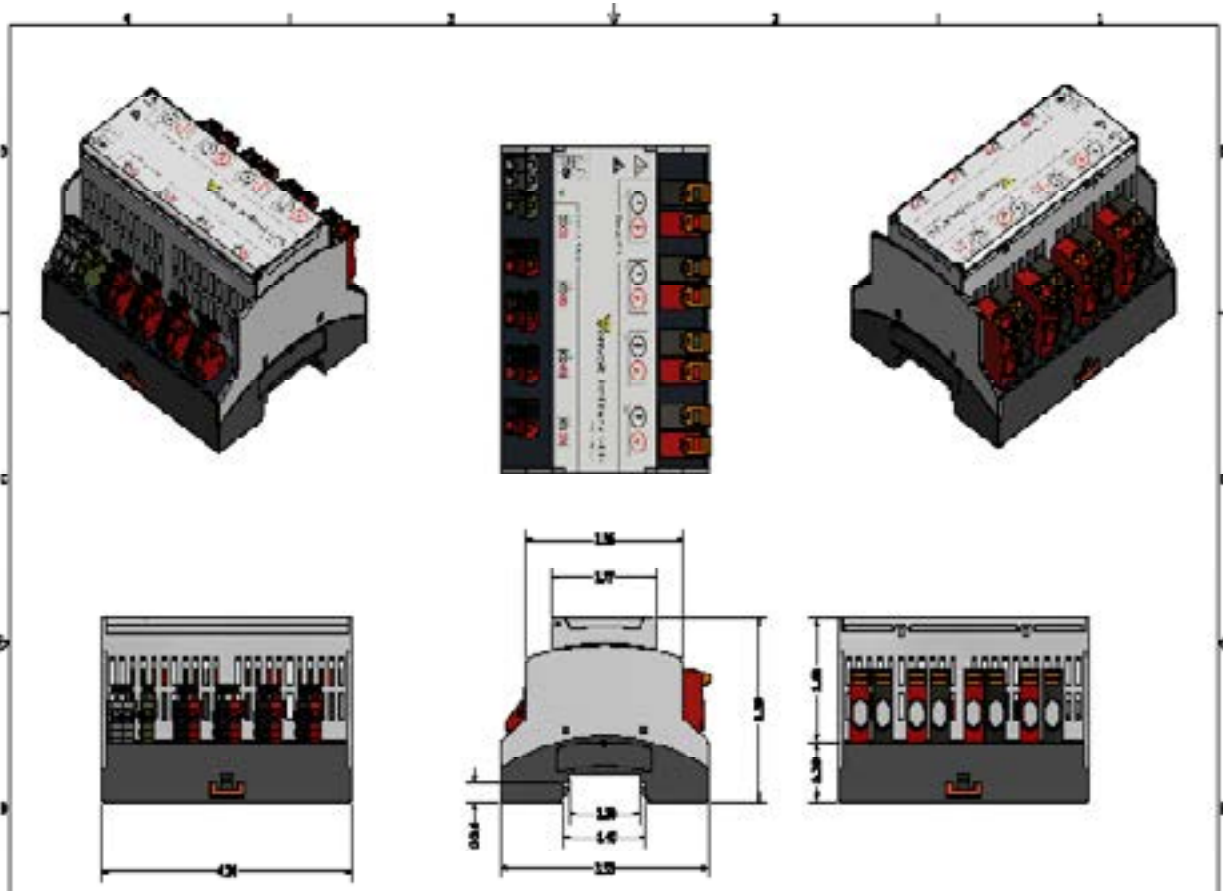

HARDWARE CONFIGURATION

A. Connect power source to the sensor module. For proper functioning the power supply should provide a voltage between 8V and 28V with at least 0.2A of continuous current and 0.4A surge during module start-up.

B. Securely connect wire in the 20-6 AWG range between the source of measurement and an available IsoBlock's input screw terminal.

C. Securely connect one end of a twisted pair to the output terminals, and the other end to the inputs of your data acquisition unit.

Standards and Certifications

- CE

DANGER

THIS SENSOR IS NOT A SAFETY DEVICE AND IS NOT INTENDED TO BE USED AS A SAFETY DEVICE. This sensor is designed only to detect and read certain data in an electronic manner and perform no use apart from that, specifically no safetyrelated use. This sensor product does not include self-checking redundant circuitry, and the failure of this sensor product could cause either an energized or de-energized output condition, which could result in death, serious bodily injury, or property damage.

