


IsoBlock V

Galvanically Isolated Differential Voltage Sensor

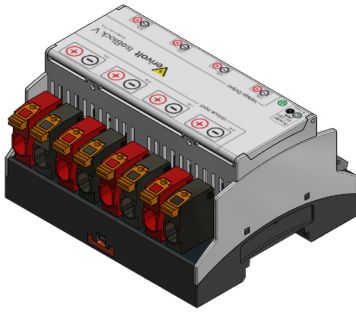

OVERVIEW

The IsoBlock V module has been designed to provide high-quality isolated differential voltage measurements for applications requiring scaling of high voltages, as well as superior isolation.

Each IsoBlock V unit hosts four separate isolated channels, each of which can be connected to separate measurement sources while providing a range of functional coverage up to 1500V. The input of each specific IsoBlock channel has its own isolated reference, and can be configured to suit user needs. All processed signals output from the IsoBlock unit are referenced in respect to the ground channel of the user's data acquisition system.

Verivolt designs its IsoBlock V modules with consideration for user great flexibility, high channel density and low power consumption.

SPECIFICATION


IsoBlock V	50V	100V	200V	300V	500V	750V	1000	500V
Bandwidth (-3dB point)	100kHz (100kHz to 300kHz custom)							
Differential input dynamic range	10mV	50mV	100mV	500mV	2V	5V	10V	20V
	30V	50V	100V	200V	300V	500V	7500V	1000V
	1500V							

HARDWARE DESCRIPTION

The IsoBlock V module is designed to isolate and scale down high voltages found in industrial environments. The end result is a signal ready to connect to any data acquisition system, while galvanically isolating the source from it.

Each channel of the IsoBlock module has a galvanic isolation from the input to the output that can eliminate large common mode voltages. In addition to that, each channel also has a protection stage at the input that guards it from surges.

Following the input surge protection stage, there is an amplification stage that brings the input signal to a $\pm 10V$ range. This signal is modulated into a magnetic field, and then transferred across a galvanic barrier. A demodulating stage recovers the original signal, followed by an anti-aliasing filter and a conditioning stage to output a $\pm 10V$ differential pair. The figure below shows a block diagram of the process described above.

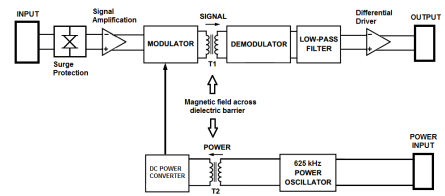

IsoBlock V single channel block diagram.

UL Certification

UL 61010-1

UL 61010-2-030

Electrical

Accuracy (percentage of reading)	$\pm(0.2\% \text{ of reading} + 0.005\% \text{ range})$ or $\pm(0.1\% \text{ of reading} + 0.005\% \text{ range})$
----------------------------------	--

Max total phase shift at 60Hz	$< 0.05^\circ$
-------------------------------	----------------

Max input delay (100kHz versions)	5.7 μs
-----------------------------------	-------------

Isolation voltage from primary to secondary	$\pm 1500 V$
---	--------------

Max common mode transient voltage for 1 minute	$\pm 5000 V$
--	--------------

Max differential-mode transient voltage at 65°C	
---	--

For ranges: 5V, 10V, 15V, 20V, 30V	300V
------------------------------------	------

For ranges: 50V, 100V, 150VAC, 300V, 250VAC	1000V
---	-------

For ranges: 500V, 500VAC, 750V, 1000V, 1500V	2000V
--	-------

Mechanical

Mounting Type	DIN Rail
---------------	----------

Connectivity	Spring Cage connector
--------------	-----------------------

Outer Dimensions	3.9" x 3.5" x 2.5"
------------------	--------------------

Channels	4 channels
----------	------------

Weight	198 g (7.0 oz)
--------	----------------

Performance

Input-Output non-linearity	$< \pm 0.04\%$
----------------------------	----------------

Output voltage	$\pm 10 V$ ($\pm 5V$ custom)
----------------	-------------------------------

Gain temperature drift	$\pm 50 \text{ ppm}/^\circ C$
------------------------	-------------------------------

Common mode rejection at 60Hz	112 dB
-------------------------------	--------

Power Supply Voltage*	12V to 28 V
-----------------------	-------------

Output type	Differential pair
-------------	-------------------

Output Offset Voltage (Referenced to output)	$2\sigma < \pm 500 \mu V$ (typical) $4\sigma < \pm 1 mV$ (limit)
--	---

Differential Input impedance	
------------------------------	--

For ranges: 5V, 10V, 15V, 20V, 30V	440 k Ω
------------------------------------	----------------

For ranges: 50V, 100V, 150VAC, 300V, 250VAC	2M Ω
---	-------------

For ranges: 500V, 500VAC, 750V, 1000V, 1500V	8M Ω
--	-------------

Insulation impedance	$> 10 G\Omega \parallel 2pF$
----------------------	------------------------------

Output impedance	20 Ω
------------------	-------------

Environmental


Operating temperature	-25 to 70 $^\circ C$
-----------------------	----------------------

Storage temperature	-40 to 80 $^\circ C$
---------------------	----------------------

*New powering voltage range since January of 2020

- The isolation barrier of every device is tested with a 5 second partial discharge of 1800V for 5 seconds, with a detection threshold of 150pC.
- Withstanding common mode surge voltage is 2 seconds half sinewave.
- Withstanding differential mode surge voltage is 4 seconds half sinewave.

MERCHANDISE DIMENSIONS

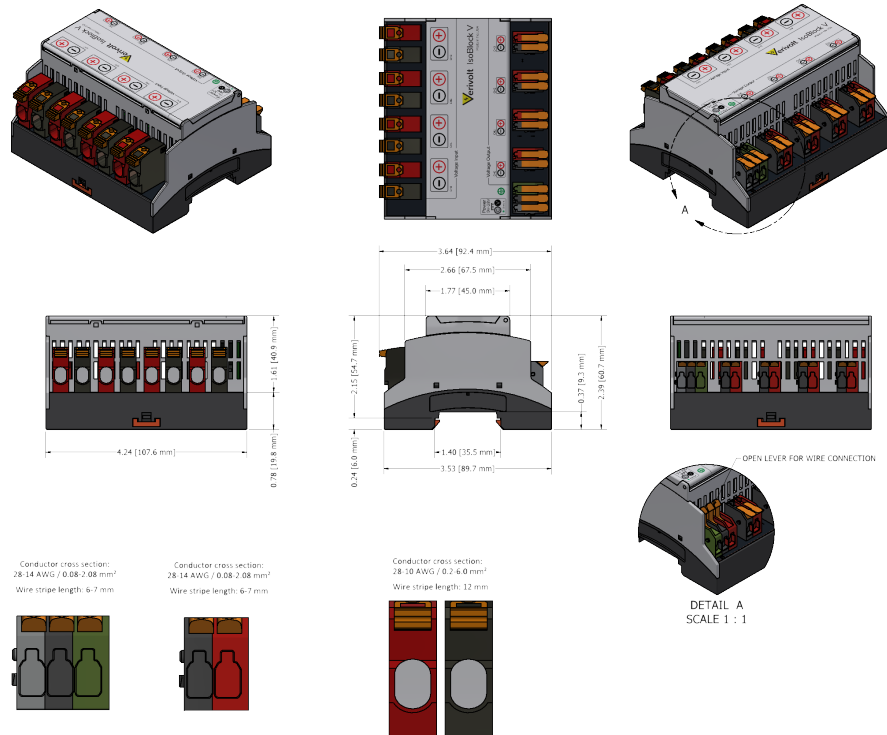


HARDWARE CONFIGURATION

A. Connect external power source to power the unit. For proper functioning the power supply should provide a voltage between 12V and 28V with at least 4W continuous and three times surge during module start-up. (10ms)

B. Securely connect wire in the 20-6 AWG range between the source of measurement and an available IsoBlock's input spring cage terminal.

C. Securely connect one end of a twisted pair to the output terminals, and the other end to the inputs of your data acquisition unit

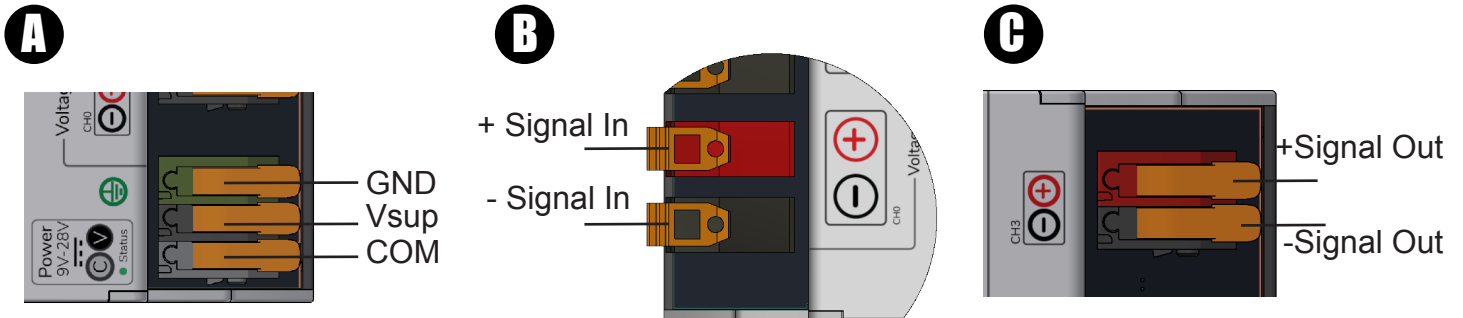

Standards and Certifications

CE | UL



⚠ WARNING

THIS SENSOR IS NOT A SAFETY DEVICE AND IS NOT INTENDED TO BE USED AS A SAFETY DEVICE. This sensor is designed only to detect and read certain data in an electronic manner and perform no use apart from that, specifically no safety-related use. This sensor product does not include self-checking redundant circuitry, and the failure of this sensor product could cause either an energized or de-energized output condition, which could result in death, serious bodily injury, or property damage.